
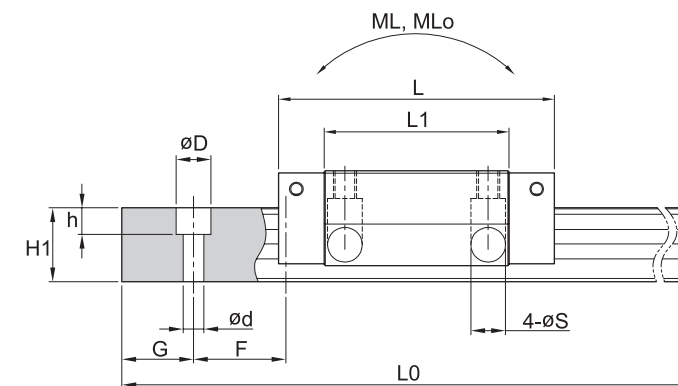


MG - LC形 / MG - LL形

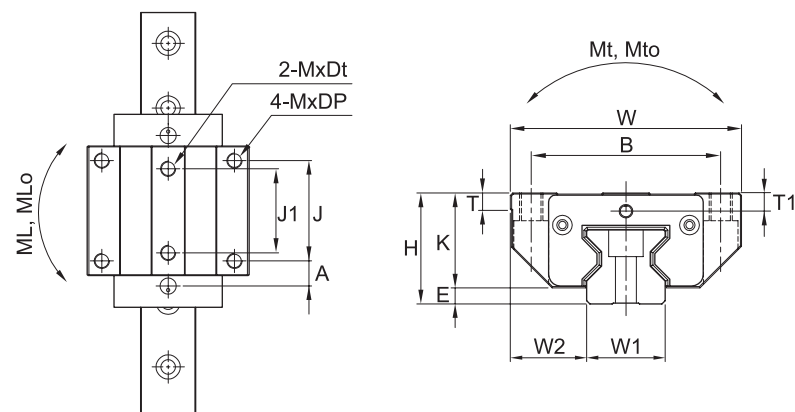

単位：mm

| 型番 | 組立寸法 | | | | ブロック寸法 | | | | | | | | | | | | | | |
|--------|------|-----|-------|-----|--------|-----|----|-----|----|----|------|-------|------|------|-----|------|---|----|---|
| | H | W | L | E | 取付け穴 | | | | | | | | | | L1 | T | K | T1 | A |
| | | | | | B | J | J1 | M | DP | S | Dt | | | | | | | | |
| MG25LC | 36 | 70 | 90.2 | 5.5 | 57 | 45 | 40 | M8 | 9 | 11 | 6.5 | 62 | 7.5 | 29.5 | 5.5 | 14 | | | |
| MG25LL | 36 | 70 | 109.7 | 5.5 | 57 | 45 | 40 | M8 | 9 | 11 | 6.5 | 81.5 | 7.5 | 29.5 | 5.5 | 23.7 | | | |
| MG35LC | 48 | 100 | 119.3 | 7 | 82 | 62 | 52 | M10 | 12 | 15 | 10 | 80 | 8 | 41 | 7.9 | 15.5 | | | |
| MG35LL | 48 | 100 | 142.3 | 7 | 82 | 62 | 52 | M10 | 12 | 15 | 10 | 103 | 8 | 41 | 7.9 | 27 | | | |
| MG45LC | 60 | 120 | 147.3 | 10 | 100 | 80 | 60 | M12 | 15 | 18 | 12 | 101.3 | 10 | 50 | 8 | 17.6 | | | |
| MG45LL | 60 | 120 | 179.8 | 10 | 100 | 80 | 60 | M12 | 15 | 18 | 12 | 133.8 | 10 | 50 | 8 | 33.9 | | | |
| MG55LC | 70 | 140 | 173 | 13 | 116 | 95 | 70 | M14 | 18 | 20 | 13.5 | 120 | 12 | 57 | 9 | 21.5 | | | |
| MG55LL | 70 | 140 | 215 | 13 | 116 | 95 | 70 | M14 | 18 | 20 | 13.5 | 162 | 12 | 57 | 9 | 42 | | | |
| MG65LC | 90 | 170 | 221.8 | 12 | 142 | 110 | 82 | M16 | 15 | 23 | 19.5 | 159.3 | 15.5 | 78 | 22 | 29 | | | |
| MG65LL | 90 | 170 | 272.3 | 12 | 142 | 110 | 82 | M16 | 15 | 23 | 19.5 | 210.3 | 15.5 | 78 | 22 | 54.3 | | | |

単位：mm

| レール寸法 | | | | | | | | | 基本定格荷重 | | 静的許容モーメント | | | | 質量 | |
|-------|------|------|------|---------|----|------|------|------------|--------------|---------------|-----------|-------|------|-------|------|--------|
| W1 | W2 | H1 | F | ボルト取付け穴 | | | G | 最大長さ L0 | 動定格 C(KN) | 静定格 Co(KN) | [KN・m] | | | | ブロック | レール |
| | | | | d | D | h | | | | | Mt | Mto | ML | MLo | [kg] | [Kg/m] |
| 23.5 | 23 | 24.5 | 30 | 7 | 11 | 11.5 | 14 | 4,000 | 28.7 | 57.6 | 0.43 | 0.86 | 0.28 | 0.57 | 0.7 | 3.4 |
| 23.5 | 23 | 24.5 | 30 | 7 | 11 | 11.5 | 14 | 4,000 | 38.9 | 76.8 | 0.58 | 1.15 | 0.49 | 0.97 | 0.9 | 3.4 |
| 33 | 34 | 32 | 40 | 9 | 15 | 17 | 19 | 4,000 | 53.3 | 99 | 1.17 | 2.19 | 0.67 | 1.25 | 1.7 | 6.5 |
| 33 | 34 | 32 | 40 | 9 | 15 | 17 | 19 | 4,000 | 72.6 | 136 | 1.59 | 3.01 | 1.18 | 2.24 | 2.2 | 6.5 |
| 37.5 | 45 | 40 | 52.5 | 14 | 20 | 19 | 25 | 4,000 | 95 | 184 | 2.61 | 5.07 | 1.53 | 2.97 | 3.3 | 10.7 |
| 37.5 | 45 | 40 | 52.5 | 14 | 20 | 19 | 25 | 4,000 | 119.5 | 242.2 | 3.29 | 6.67 | 2.44 | 4.95 | 4.3 | 10.7 |
| 43.5 | 53 | 48 | 60 | 16 | 24 | 22 | 29 | 4,000 | 132.6 | 256 | 4.50 | 8.7 | 2.57 | 4.98 | 5.1 | 15.2 |
| 43.5 | 53 | 48 | 60 | 16 | 24 | 22 | 29 | 4,000 | 176 | 351 | 5.97 | 11.91 | 4.47 | 8.91 | 7 | 19.2 |
| 63 | 53.5 | 55 | 75 | 18 | 26 | 26 | 36.5 | 4,000 | 212 | 414 | 8.10 | 15.78 | 5.21 | 10.14 | 9.3 | 22.5 |
| 63 | 53.5 | 55 | 75 | 18 | 26 | 26 | 36.5 | 4,000 | 276 | 579 | 10.53 | 22.10 | 8.98 | 11.84 | 13.5 | 22.5 |

- C：基本動定格荷重
- Co：基本静定格荷重
- Mt：動的ローリング方向
- Mto：静的ローリング方向モーメント
- ML：ピッチング方向動的モーメント
- MLo：ピッチング方向静的軸方向モーメント