

正样  
2024.04.03  
B00



版权所有侵权必究

外部公开








苏州汇川技术有限公司

Amendment	Description

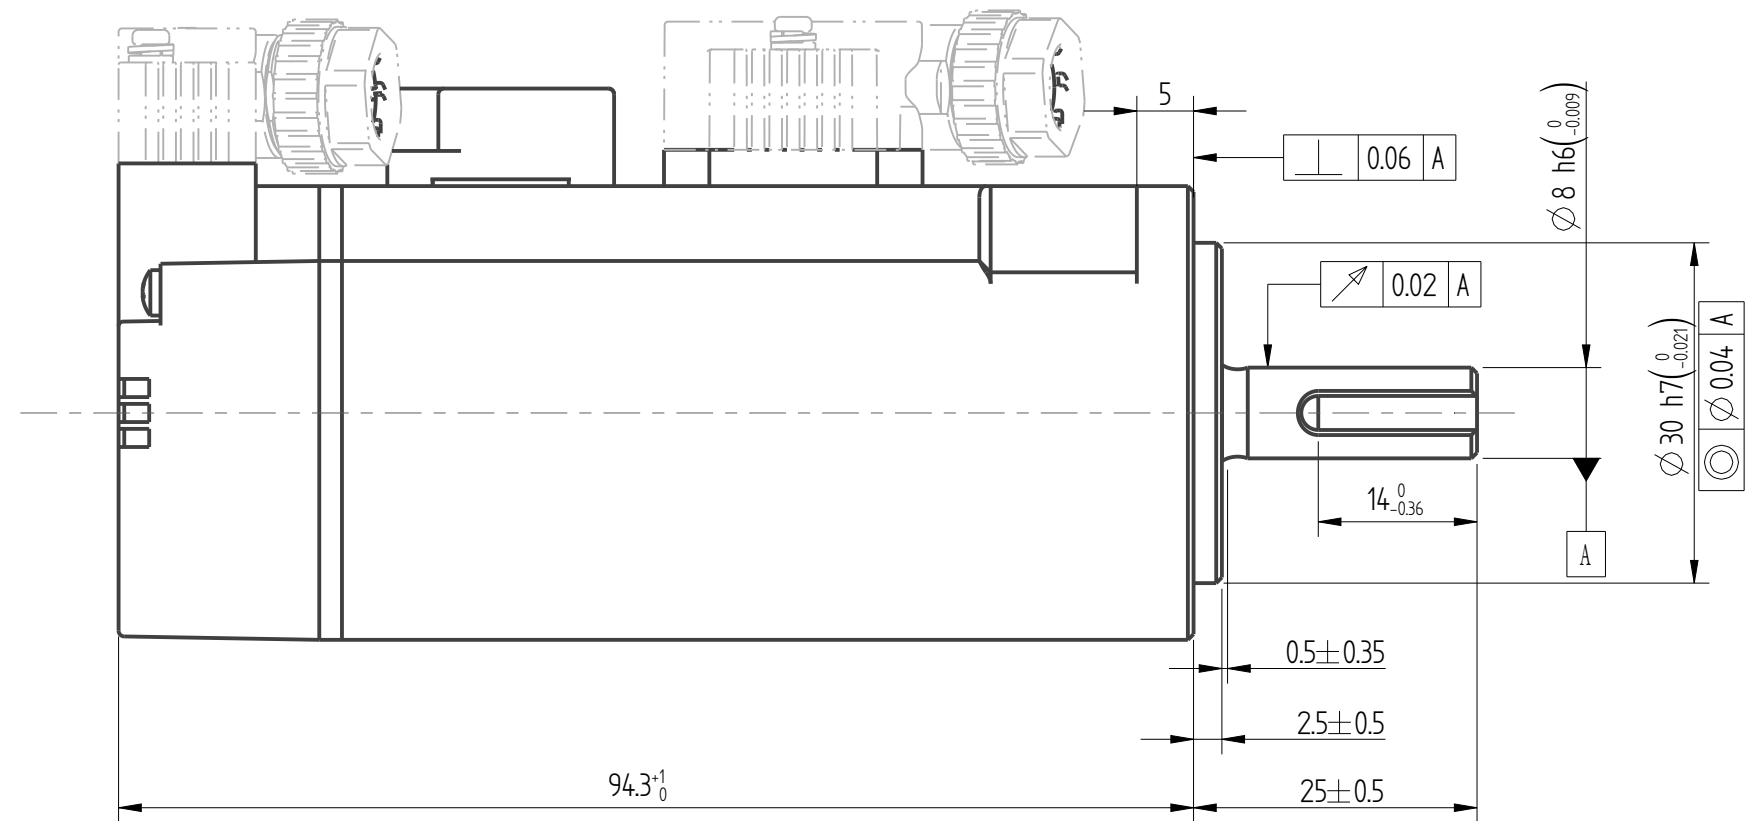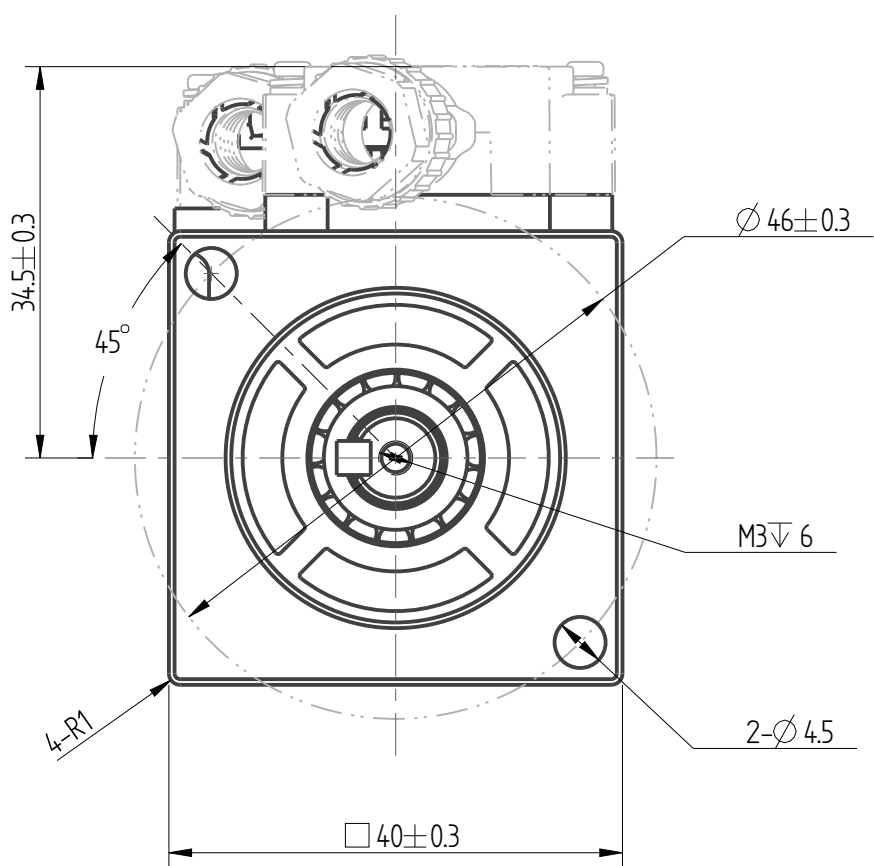

Basic function parameters	
Rated power KW	0.1
Rated voltage V	220
Rated current A	1.2
Peak current at rated speed A	4.8
Rated torque Nm	0.32
Peak torque at rated speed Nm	1.12
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg·cm <sup>2</sup>	0.0345±10%
Encoder resolution	26bit
Insulation class	F
Protection level	IP67
Static torque of brake Nm	≥0.32
Brake power supply	DC24V±10%
Duty cycle	S1
Radial line load N	≤78
Axial load N	≤54

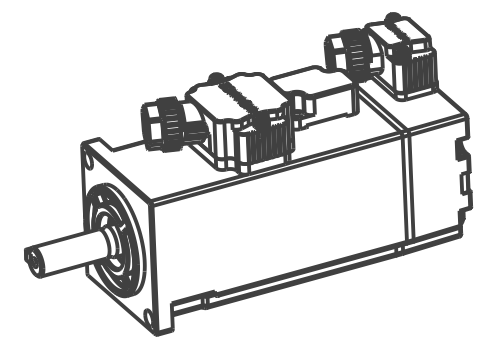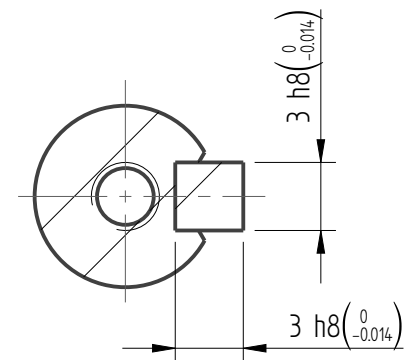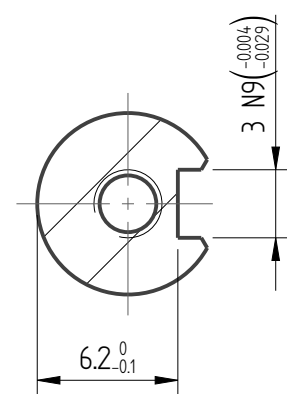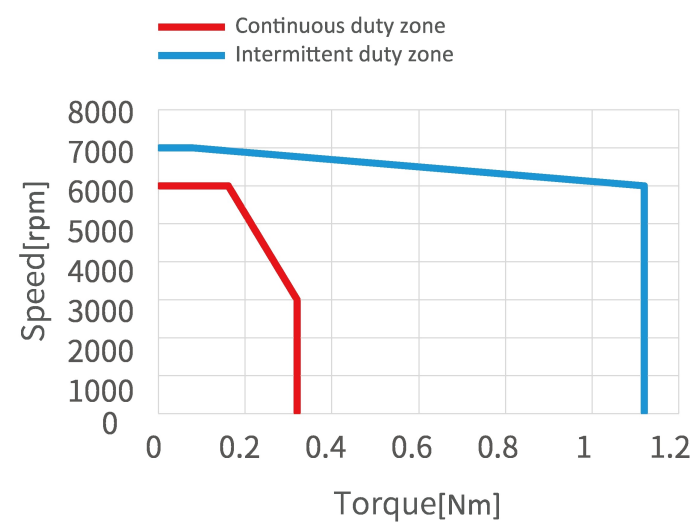

				Motor Outline Drawing			01119500-WX	
B00	New Archive	/	20230825					
Version	Change method	Changed by	Date				Mark	 <b>INOVANCE</b>
Design	/							
Check	/							
Craft	/							
Verify	/			Weight	Scale	Version	Page 1 of 1	
Standardization	/			0.43 kg	1:1	B00	Model	MS1H1-10B30CB-S632R-INT
Approve	/							