
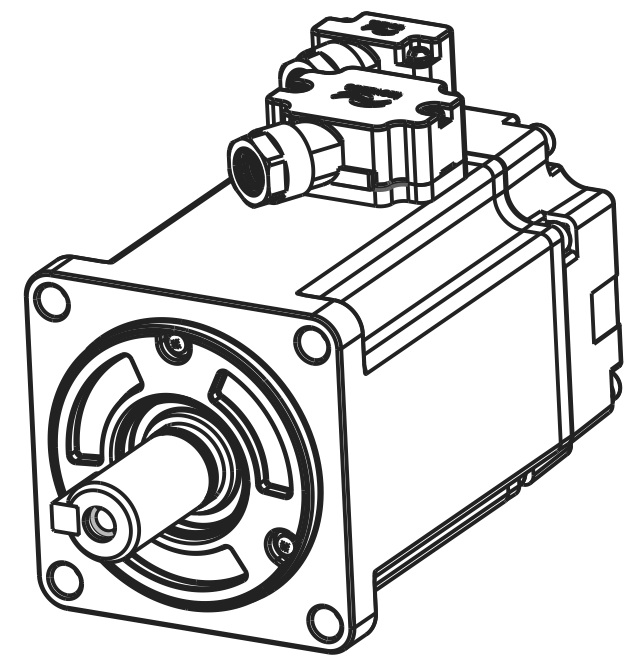
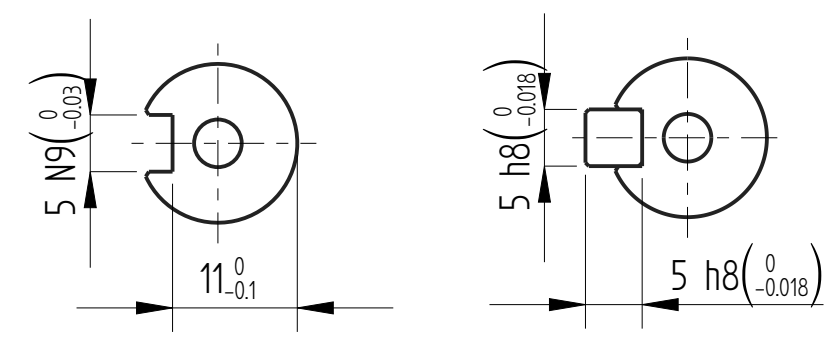
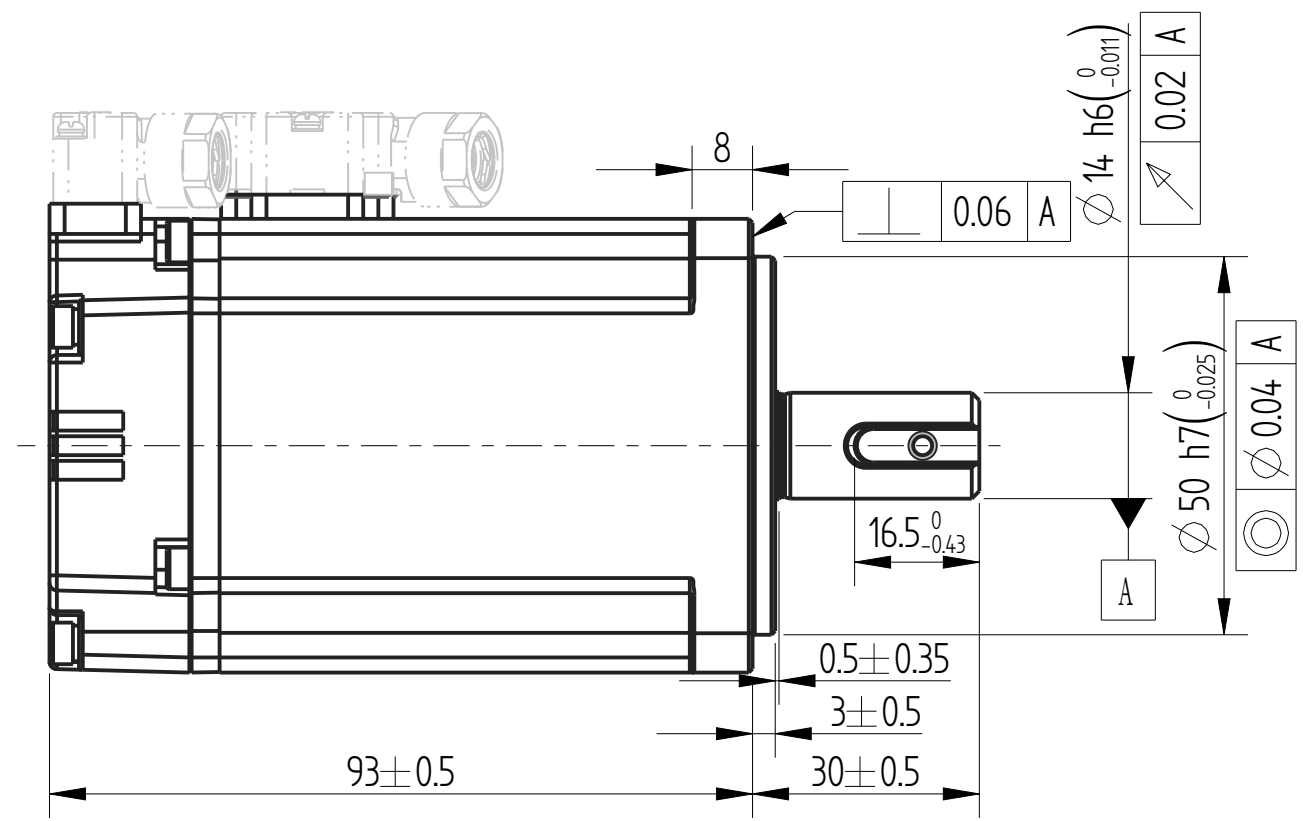


正样  
2023.09.25  
B00


外部公开

Copyright:Copyright infringement reserved.

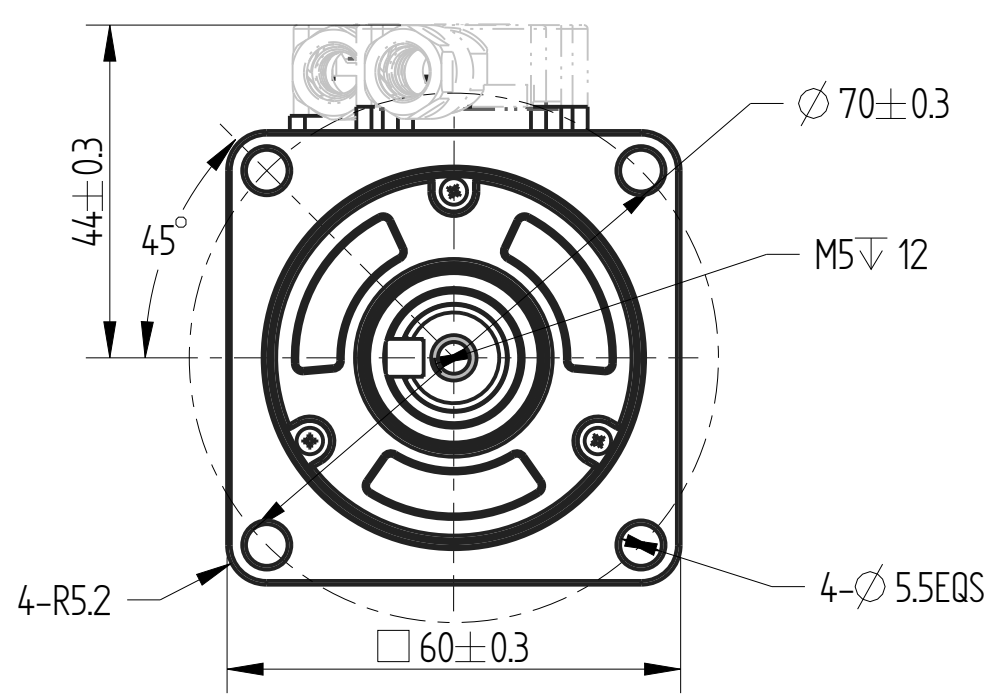

INOVANCE

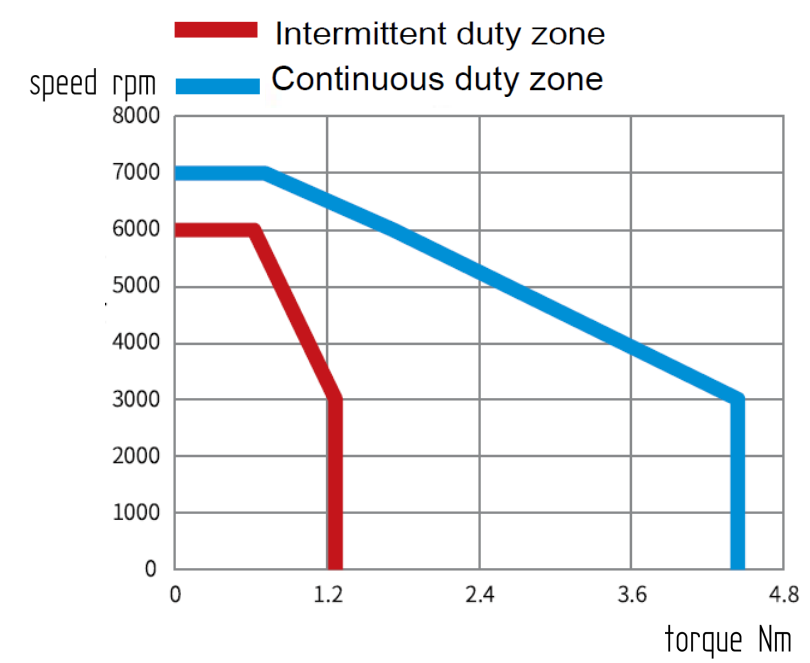

Dimension of shaft end      Dimension of shaft end with key



Basic function parameters	
Rated power KW	0.4
Rated voltage V	220
Rated current A	≤2.5
Peak current at rated speed A	≤9.8
Rated torque Nm	1.27
Peak torque at rated speed Nm	4.45
Rated speed rpm	3000
Max speed rpm	7000
Rotor inertia kg·cm <sup>2</sup>	0.53
Encoder resolution	26位
Insulation class	F
Protection Level	IP67
Static torque of brake Nm	/
Brake power supply	/
Duty cycle	S1
Radial line load N	≤245
Axial load N	≤74

				Motor outline drawing			01118295-WX	
B00	New Archive	/	20230825					
Version	Change method	Change by	Date	/				
Design	/							
Check	/							
Craft	/							
Verify	/			Weight	Scale	Version	Page 1 of 1	
Standardization	/			/	1:1	B00	Model	MS1H1-40B30CB-A631R-INT
Approve	/							