
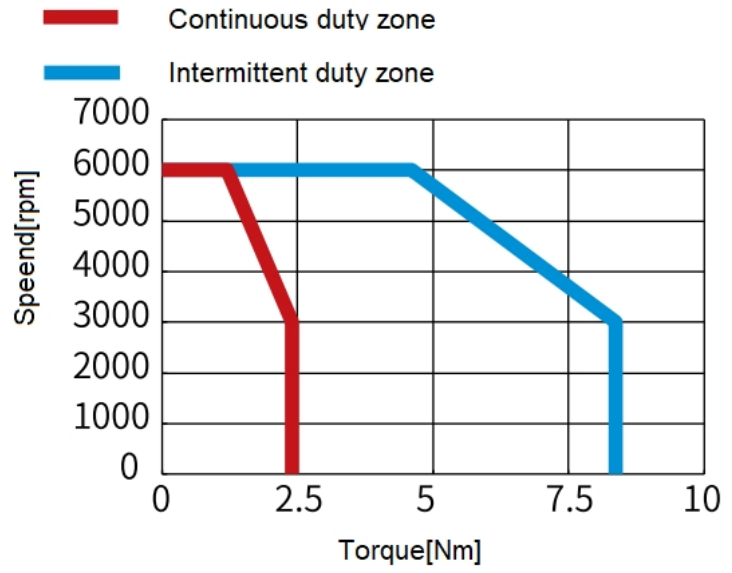
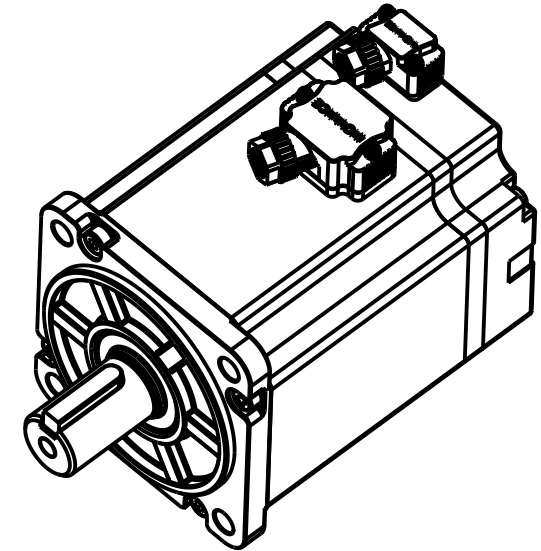
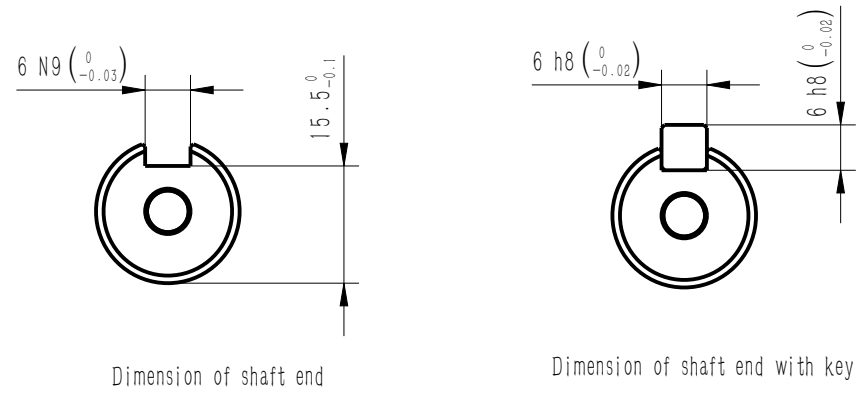
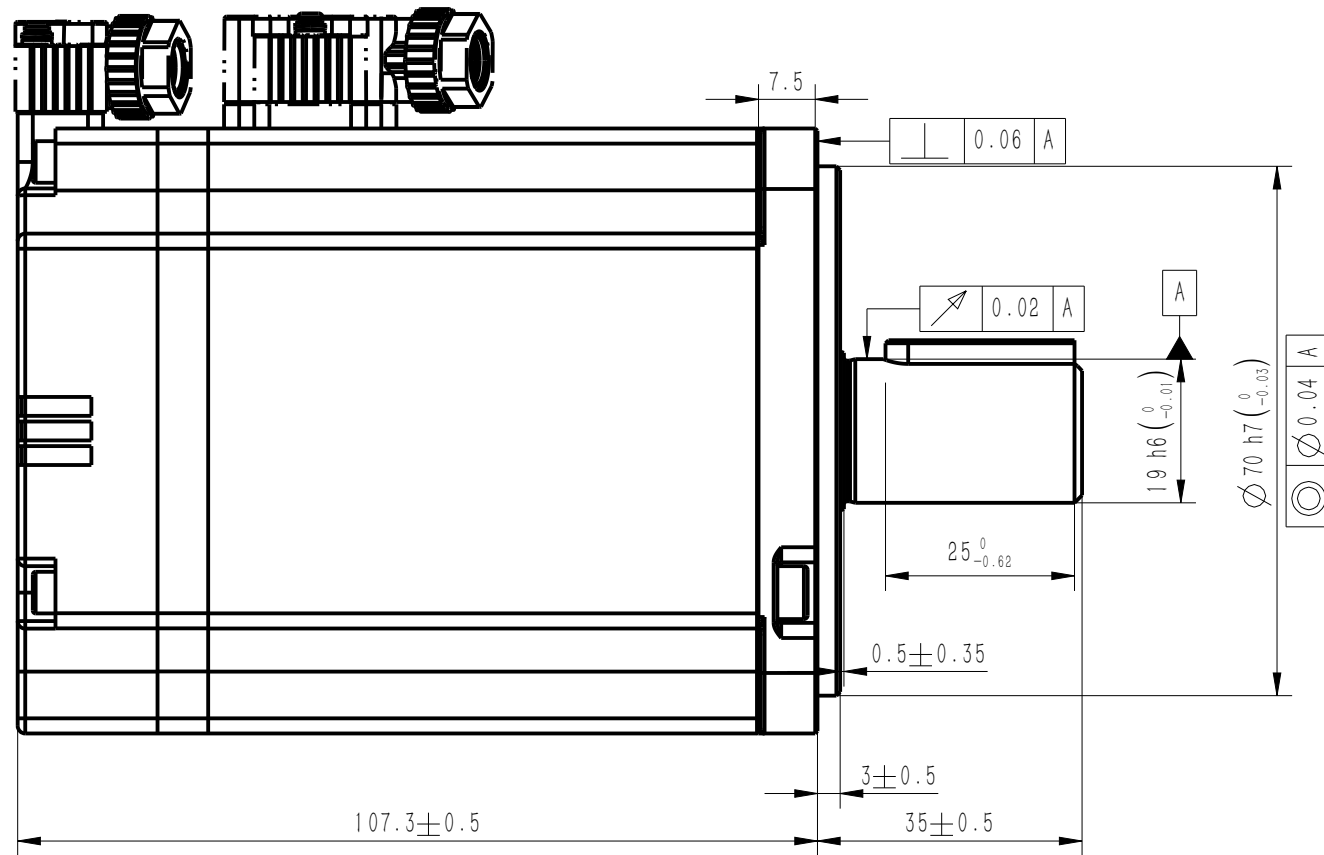


正样
2023.09.26
B00

Copyright: Copyright infringement reserved

外部公开

Unit: Millimeter (mm)

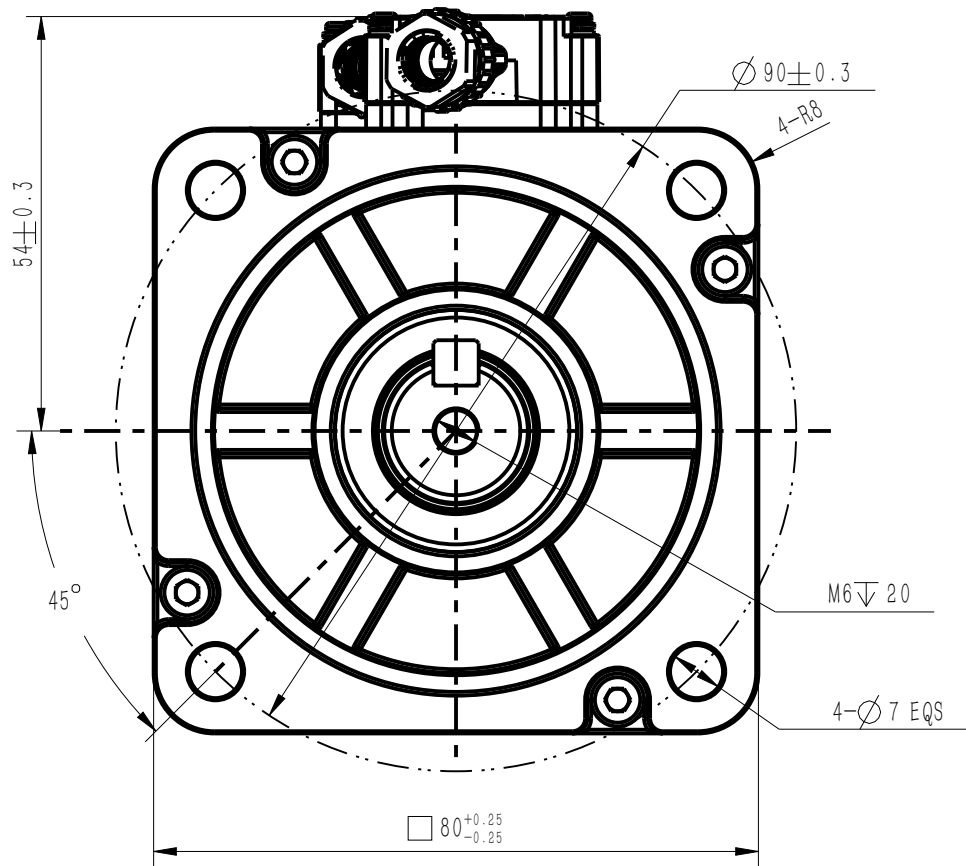

Basic function parameters	
Rated power KW	0.75
Rated voltage V	220
Rated current A	≤4.4
Peak current at rated speed A	≤16.9
Rated torque Nm	2.39
Peak torque at rated speed Nm	8.36
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia kg·cm2	0.68
Encoder resolution	23bit
Insulation class	F
Protection level	IP67
Static torque of brake Nm	/
Brake power supply	/
Duty cycle	S1
Radial line load N	≤392
Axial load N	≤147

				Motor Outline Drawing			01117855-WX	
B00	New Archive	/	20230830					
Version	Change method	Changed by	Date					
Design	/			<div></div>			Mark	INOVANCE
Check	/							
Craft	/							
Verify	/							
Standardization	/			Weight	Scale	Version	Page 1 of 1	
Approve	/			2.22kg	1 : 1	B00	Model	MS1H1-75B30CB-A331R-INT