





正样
2023.10.09
B00

外部公开


INVANCE

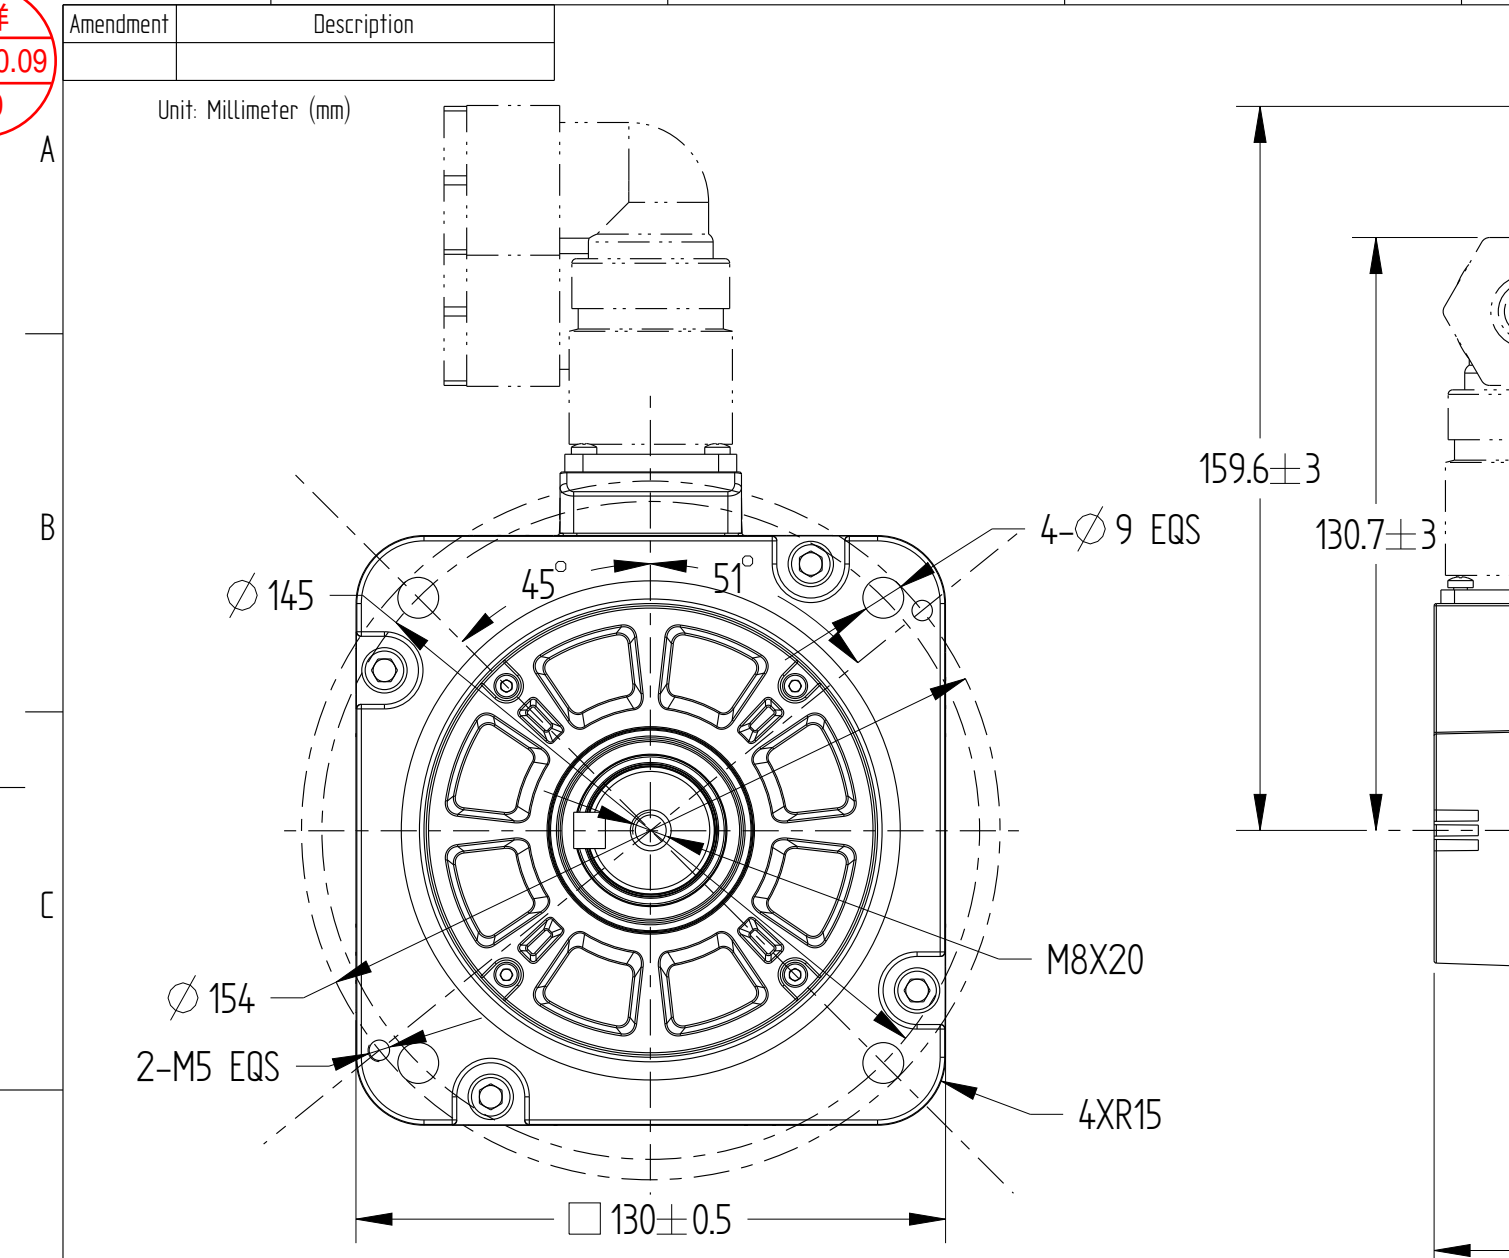

Basic function parameters	
Rated power KW	3
Rated voltage V	220
Rated current A	≤ 16.6
Peak current at rated speed A	≤ 55
Rated torque Nm	9.8
Peak torque at rated speed Nm	24.5
Rated speed rpm	3000
Max speed rpm	6000
Rotor inertia $\text{kg} \cdot \text{cm}^2$	$9.38 \pm 10\%$
Encoder resolution	26
Insulation class	F(155°C)
Protection level	IP67
Static torque of brake Nm	≥ 16
Brake power supply	DC24 $\pm 10\%$
Duty cycle	S1
Radial line load N	≤ 1176
Axial load N	≤ 392

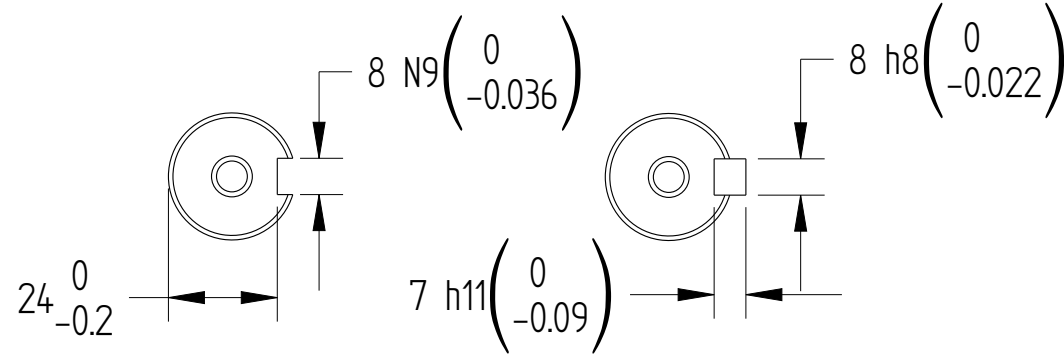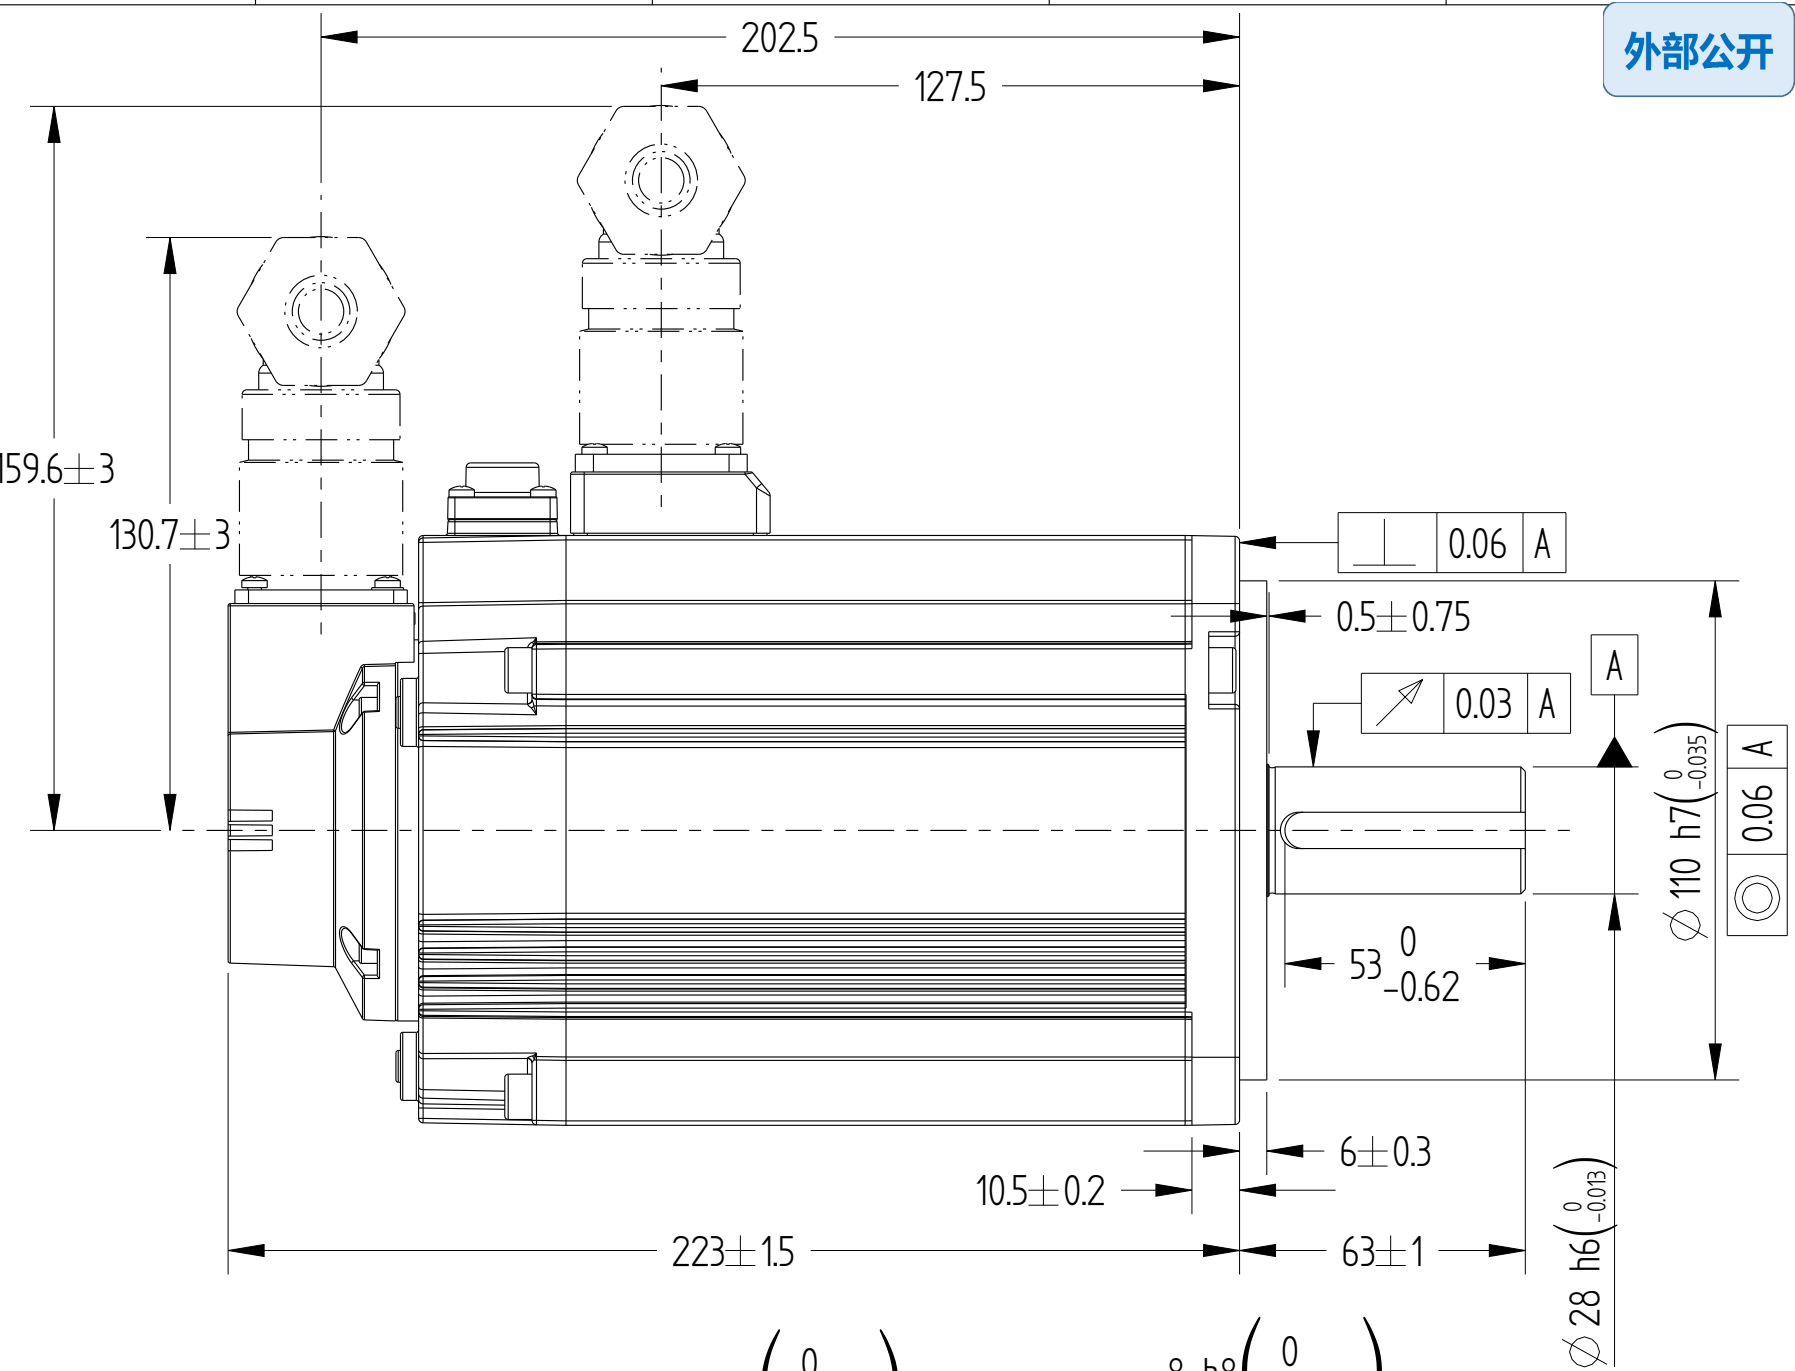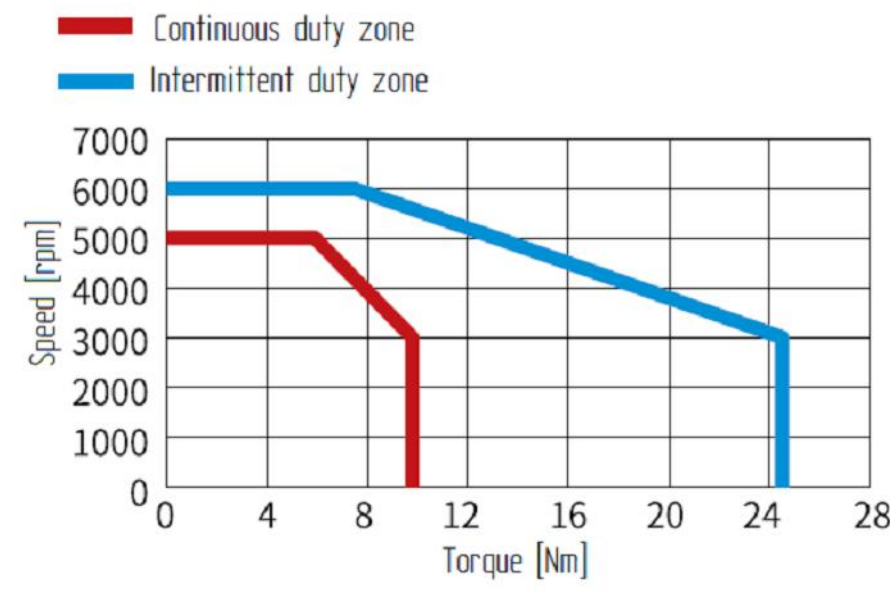

Dimension of shaft end Dimension of shaft end with key

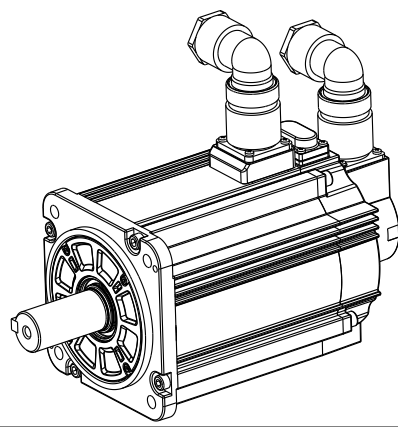

				Motor Outline Drawing			01118128-WX	
B00	New Archive	/	20230904					
Version	Change method	Changed by	Date					
Design	/			/			Mark	INOVANCE
Check	/							
Craft	/							
Verify	/			Weight	Scale	Version	Page 1 of 1	
Standardization	/			11.9kg	35	B00	Model	MS1H2-30C30CB-S634R-INT
Approve	/							